




Standard Brake & Clutch Rivets

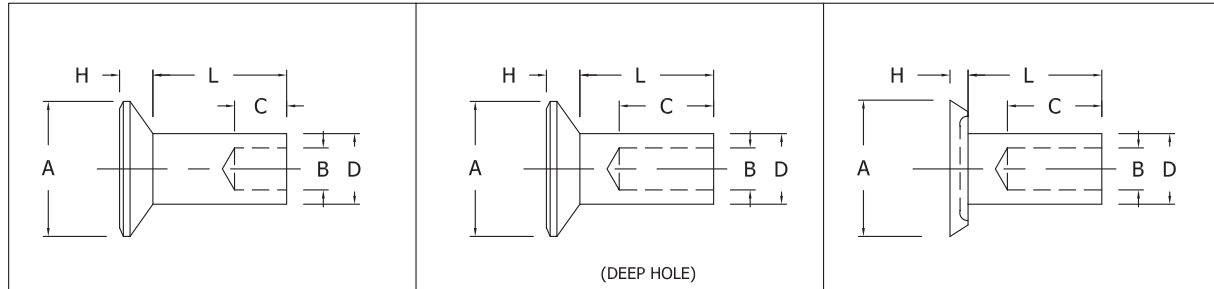

DWG.8 FLAT COUNTERSUNK HEAD			DWG.9 FLAT COUNTERSUNK HEAD					DWG.10 UNDERCUT HEAD				
NOMINAL SHANK Ø	NOMINAL HEAD Ø	DWG No.	REC. HOLE Ø IN ASSEMBLY	MIN. CLINCH ALLOWANCE	SHANK Ø 'D'	HEAD Ø 'A'	HEAD THICKNESS 'H'	HOLE Ø 'B'	HOLE DEPTH 'C' *	RIVET NUMBER		
										BRASS PLAIN & WAX	STELL BRASS PLTD. & WAX	
1/8	15/64	8	0.128	0.062	0.118 0.123	0.235 0.250	0.030 MAX.	0.084 0.090	0.093	B2	S2	
9/64	19/64	9	0.152	0.125	0.141 0.146	0.289 0.303	0.035 0.045	0.099 0.105	0.218	B3	S3	
9/64	19/64	8	0.152	0.093	0.141 0.146	0.289 0.303	0.035 0.045	0.099 0.105	0.140	B4	S4	
9/64	23/64	8	0.152	0.093	0.141 0.146	0.351 0.367	0.041 0.051	0.099 0.105	0.140	B5	S5	
9/64	23/64	9	0.152	0.125	0.141 0.146	0.351 0.367	0.041 0.051	0.099 0.105	0.218	B16 ♦	S16 ♦	
9/64	19/64	10	0.152	0.093	0.141 0.146	0.287 0.307	0.036 0.044	0.099 0.105	0.140	B22	S22	
5/32	19/64	9	0.165	0.125	0.151 0.156	0.289 0.303	0.035 0.045	0.107 0.114	0.250	B21 ♦	S21 ♦	
5/32	23/64	9	0.165	0.125	0.151 0.156	0.351 0.367	0.041 0.051	0.107 0.114	0.250	B11 ♦	S11 ♦	
3/16	23/64	8	0.196	0.110	0.182 0.188	0.351 0.367	0.041 0.051	0.133 0.139	0.187	B7	S7	
3/16	15/32	8	0.196	0.110	0.182 0.188	0.458 0.478	0.053 0.067	0.133 0.139	0.187	B8	S8	
3/16	23/64	9	0.196	0.156	0.182 0.188	0.351 0.367	0.041 0.051	0.133 0.139	0.281	B17 ♦	S17 ♦	
3/16	23/64	10	0.196	0.110	0.182 0.188	0.349 0.369	0.036 0.044	0.133 0.139	0.187	B24	S24	
0.195 0.200	1/2	8	0.209	0.110	0.195 0.200	0.458 0.478	0.053 0.067	0.142 0.145	0.187	B20 ♦	S20 ♦	
0.210	23/64	10	0.218	0.115	0.208 0.212	0.349 0.369	0.036 0.044	0.165 0.169	0.187	B23	S23	
1/4	15/32	8	0.266	0.156	0.244 0.252	0.458 0.478	0.053 0.067	0.186 0.190	0.250	B10	S10	

- ★ HOLE DEPTH MAY BE LESS FOR SHORTEST LENGTHS
- ♦♦ HOLE DIAMETER FOR BRASS IS 0.128 - 0.132"
- ♦ THESE ITEMS NOT NORMALLY STOCKED. MADE TO ORDER

PLATED STEEL EYELETS ARE AVAILABLE IN SERIES 22, 23 & 24 SIZES

After having selected the style & dimensions of the rivet required, a suffix must be added to the part number to indicate the length of the rivet in 16th's of an inch e.g. A B24 rivet 5/16th of the inch long would be B24-5; an S22 rivet 9/32nd's of an inch long would be an S22-4.5

PRODUCT SPECIFICATIONS IN THIS CATALOGUE ARE THOSE IN EFFECT AT THE TIME OF PUBLISHING