


R-LOCK ALUMINUM

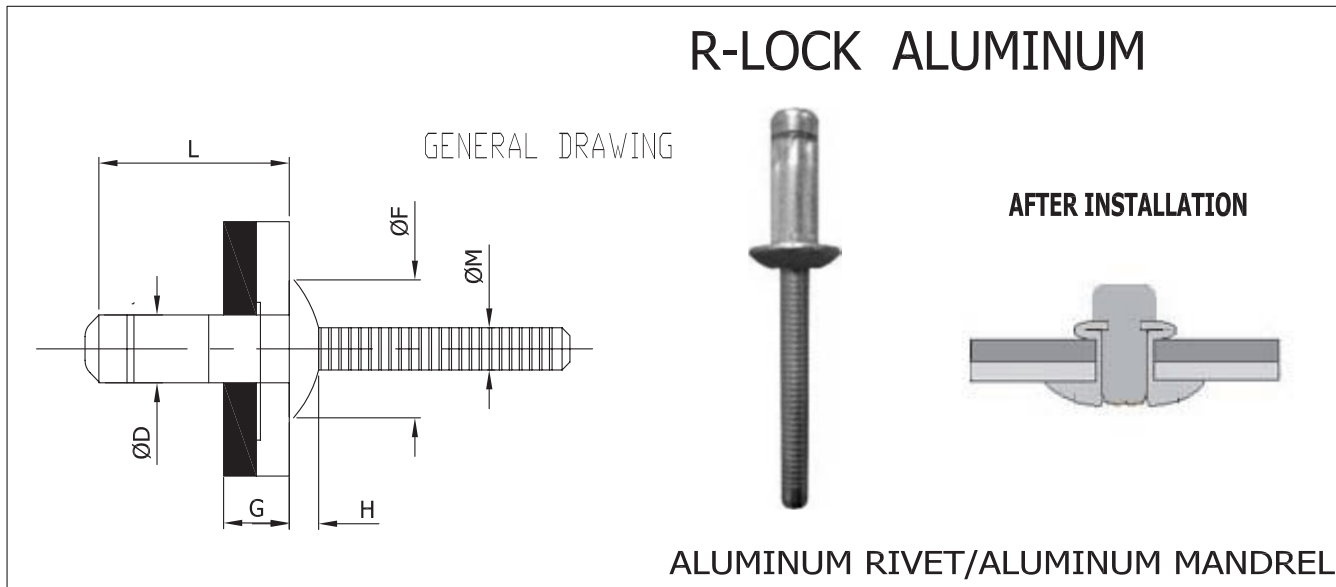

DOME FLANGE

TYPE	Part Number	L mm	G mm	D mm	H mm	F mm	M mm	STRENGTH (Kgf)		Hole Size mm
								Shear	Tensile	
6.4 mm	SAA83RL	10.5	2.8-4.8	6.4	3.0	13.0	4.17	500	350	6.6-6.8
	SAA84RL	12.5	4.8-6.8							
	SAA86RL	14.5	6.8-8.8							
	SAA87RL	16.5	8.8-10.8							
	SAA88RL	18.5	10.8-12.8							
SAA810RL	20.5	12.8-14.8								

COUNTERSANK FLANGE

TYPE	Part Number	L mm	G mm	D mm	H mm	F mm	M mm	STRENGTH (Kgf)		Hole Size mm
								Shear	Tensile	
6.4 mm	SAC83RL	11.5	3.8-5.8	6.4	2.0	10.0	4.17	400	300	6.6-6.8
	SAC85RL	13.5	5.8-7.8							
	SAC86RL	15.5	7.8-9.8							
	SAC87RL	17.5	9.8-11.8							
	SAC89RL	18.5	11.8-13.8							
	SAC810RL	21.5	13.8-15.8							

Product specification are in effect at the time of publishing